



Specifications

D N (mm)	Model	Measure		Working pressure (Mpa)	Temp.
		Water(L/h)	Air(m³/h)		
15	FA20S-15	4-40	0.12-1.2	≤1.0	-20°C ~120°C
		6-60	0.3-3		
		10-100	0.5-5		
		16-160	0.8-8		
		25-250	1.2-12		
		40-400	2-20		
25	FA20S-25	63-630	2-20	≤1.0	-20°C ~120°C
		100-1000	3-30		
		160-1600	5-50		
		250-2500	8-80		
40	FA20S-40	160-1600	5-50	≤0.9	-20°C ~120°C
		250-2500	8-80		
		400-4000	12-120		
50	FA20S-50	400-4000	12-120	≤0.7	-20°C ~120°C
		630-6300	20-200		
		1000-10000	30-300		
		5000-16000			


Sizes

D N (mm)	Pipe thread connection				
	Window size axb	L2	A	Thread	Weight(Kg)
15	33x235	375	58	1/2"G, 3/8"G, 1/2"NPT*	1.1
25	50x240		74	1"G, 3/4"G, 1"NPT*	1.8
40	65x235		92	1½"G, 1½"NPT*	3.1
50	85x230		112	2"G, 2"NPT*	5.1


Material

No.	Material	No.	Material
1	304SS, 316L, PTFE	4	304SS, PTFE
2	Al.	5	304SS, Al.
3	Al.	6	304SS, 45#

How to order

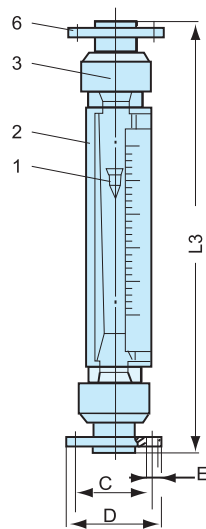

Unit:mm

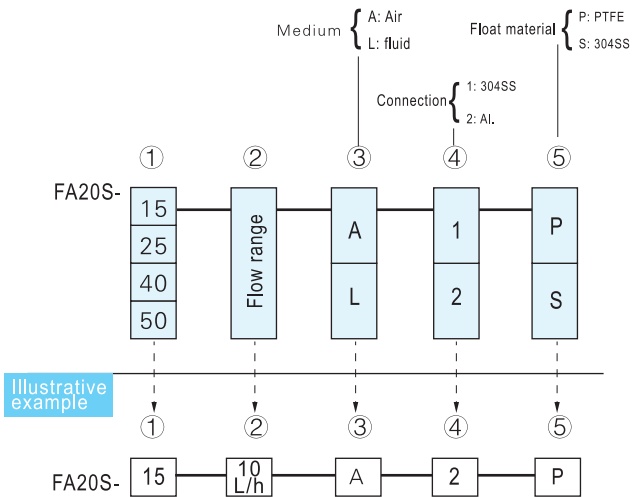

** " Special order

*:Refer to "Ordering"and"Illustrative example"when placing an order or requesting a quotation.Fill in the blanks in the order/Quotation request card" at the end of the catalog, and send the card by fax.